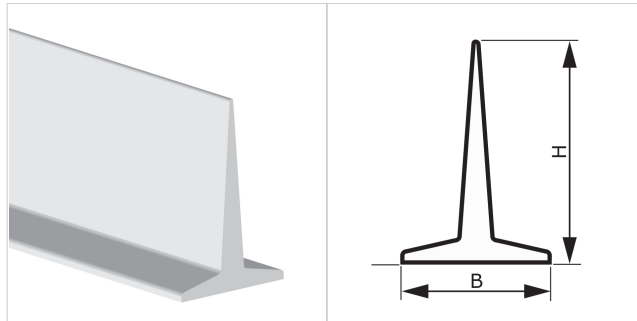


**CODE ES169**
**TYPE**
**T50 U W**
**DESCRIPTION**

Polyurethane, lateral profile, straight.


**TECHNICAL SPECIFICATIONS**

Material Polyurethane (TPU)

Hardness 85 ±5 Sh.A

Colour White

Base Flat

B Upper base 20 mm 0.79 in.

b Bottom base --- mm --- in.

H Height 50 mm 1.97 in.

Weight 245 gr/m 0.218 oz/in.

Minimum pitch

■ longitudinal	---	mm	---	in.
■ transversal	45	mm	1.8	in.

 Minimum pulley diameters<sup>(1)</sup>

■ longitudinal-driving side	---	mm	---	in.
■ longitudinal-conveying side	---	mm	---	in.
■ transversal-conveying side	60	mm	2.4	in.

<sup>(1)</sup> Minimum pulley diameters referred to environment conditions of 20°C

Temperature resistance <sup>(2)</sup>	min.	-20 °C	-4	°F
	max	70 °C	158	°F

<sup>(2)</sup> Use with limit values may reduce its life

Roll/bar sizes 2.4 m 7.9 ft

**COMPLIANCES**

 REACH EC 1907/2006 Regulation and Amendments  
 HACCP (Hazard Analysis and Critical Control Points)  
 FDA (Food and Drug Administration)

**METHOD OF APPLICATION**
**NOTES**

Issue 22-01-2020

Last Update: 22-01-2020

**DISCLAIMER**

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.