

POLYURETHANE ROUND BELTS

TECHNICAL DATA SHEET

CODE	ES222	TYPE	RU-12
-------------	--------------	-------------	--------------

COMPOSITION

Material	Thermoplastic polyurethane (TPU)
Hardness	92 ±5 Sh.A
Colour	Green
Surface	Rough
Coefficient of friction on steel	0.4

TECHNICAL SPECIFICATIONS

Diameter	12.0 mm	0.47 in.
Weight	134.0 gr/m	0.09 lbs./ft.
Minimum pulley diameter	100.0 mm	3.94 in.
Pull for 8% elongation	280.0 N	62.9 lbf.
Temperature resistance (1)	min. -20 °C max 60 °C	-4 °F 140 °F


(1) Use of the belt with limit values may reduce its life

Humidity influence	no
--------------------	----

Permanent antistatic dynamically UNI EN ISO 21179	no
---	----

JOINTING SYSTEM

Being thermoweldable polyurethane it enables quick endless jointing of belts. For high precision joints of round belts of any size CHIORINO supply the **FAST JOINT welder "S15"**.

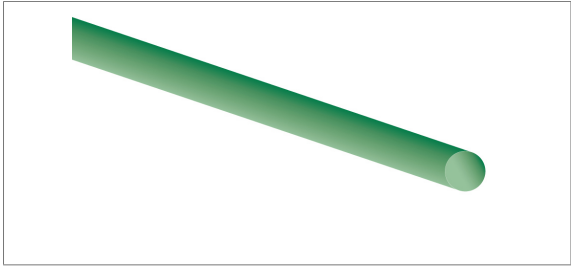

FEATURES

- Extremely good tensile strengths
- Elasticity
- Flexibility values

COMPLIANCES

REACH EC 1907/2006 Regulation and Amendments
FDA (Food and Drug Administration)

SUITABLE FOR

Packaging
Printing and graphic

NOTES

Belts which are used in various markets for transmission of light duty drives, at medium low speeds and conveying light loads.

Issue: 18-05-2010 Last Update: 8-01-2018

DISCLAIMER
The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.