
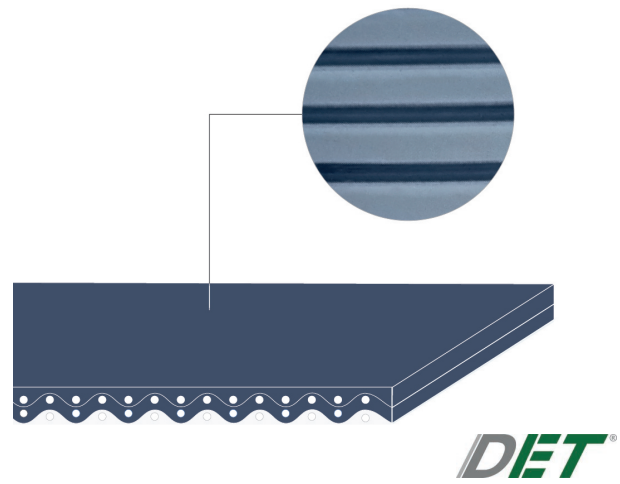


CONVEYOR AND PROCESS BELTS

TECHNICAL DATA SHEET

CODE	NA1526		TYPE	2M12 U0-U15 LT blue DET	
COMPOSITION					
Conveying surface	Material	Polyurethane (TPU)			
	Thickness	1.50 mm	0.059 in.		
	Surface pattern	LT			
	Colour	Blue			
	Coefficient of friction	MF			
Textile carcass	Material	Polyester (PET)			
	Plies no.	2			
	Weft type	Rigid			
Driving surface	Material	Fabric with polyurethane (TPU) impregnation			
	Thickness	---	mm	---	in.
	Surface pattern	LdB fabric			
	Colour	Natural			
TECHNICAL SPECIFICATIONS					
Total thickness	6.00 mm	0.24 in.			
Weight	3.50 kg/m ²	0.71 lbs./sq.ft			
Elongation at 1%	12 N/mm	69.0 lbs./in.			
Max. admissible pull	24 N/mm	137.0 lbs./in.			
Temperature resistance ⁽¹⁾	min.	-30 °C	-22 °F		
	max.	100 °C	212 °F		
⁽¹⁾ Use of the belt with limit values may reduce its life.					
Minimum radius / diameter ⁽²⁾					
■ Knife edge minimum radius	no				
■ Bending roller min. diameter	80 mm	3.15 in.			
■ Counter-bending roller min. diameter	100 mm	3.94 in.			
⁽²⁾ The above mentioned values depend on the type of CHIORINO joint recommended.					
Coefficient of friction on driving surface					
■ Raw steel sheet	0.20 [-]				
■ Laminated plastic/wood	0.25 [-]				
■ Steel roller	0.20 [-]				
■ Rubberized roller	0.30 [-]				
Max. production width	800 mm	31 in.			
SUITABLE FOR					
Food: meat and fish processing					
Food: seafood processing					
Food: conveying of dried pasta					
Packaging					
FEATURES					
Humidity influence					no
Suitable to metal detector					no
Permanent antistatic dynamically (UNI EN ISO 21179)					yes
Static conductivity (UNI EN ISO 284)					no
Conveying on skid bed					yes
Conveying on rollers					yes
Conveying on skid bed on top and return					no
Troughed conveying					no
Swan neck conveying					yes
Inclined conveying					yes
Accumulators belts					no
Curved conveyor					no
Chemical resistances link					12
COMPLIANCES					
REACH EC 1907/2006 Regulation and Amendments					
EC 1935/2004 Regulation and Amendments					
EC 2023/2006 Regulation and Amendments					
EU 10/2011, 2017/752 Regulation and Amendments					
HACCP (Hazard Analysis and Critical Control Points)					
FDA (Food and Drug Administration)					
NOTES					



Issue: 11-10-2019


Last Update: 06-07-2021

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.

CODE **NA1526** TYPE **2M12 U0-U15 LT DET**

Recommended joining procedure **SINGLE Z - 80 x 10 mm**

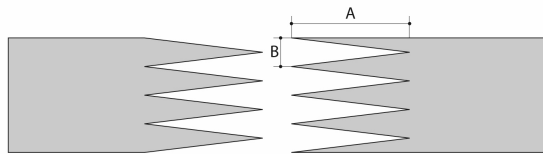

A = 80 mm
B = 10 mm

Other joining methods can be used:


Check our general catalogue to get further info on CHIORINO joining methods.

• Pressing

Heating press **P \ PL \ PLS**


Press settings	
Upper platen temperature	170 °C
Lower platen temperature	140 °C
Temperature gauge setting	150 °C
Curing time in press	3 min.
Pressure	2,5 bar
Film	TC636 - Film PU Blue DET
Cement	---

1. Use the KM330 thermometer to check the effective temperature inside the belt. Place the thermometer gauge as shown by the drawing at side.

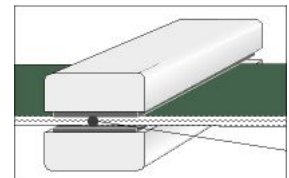

2. Allow the cooling cycle to be completed before removing the belt from the press.
3. A reliable strength of the joint is ensured, providing that temperatures reached by the press are those indicated in the table at side. A periodical inspection of the thermostats is recommended, to make sure they function correctly.

• Layout of components

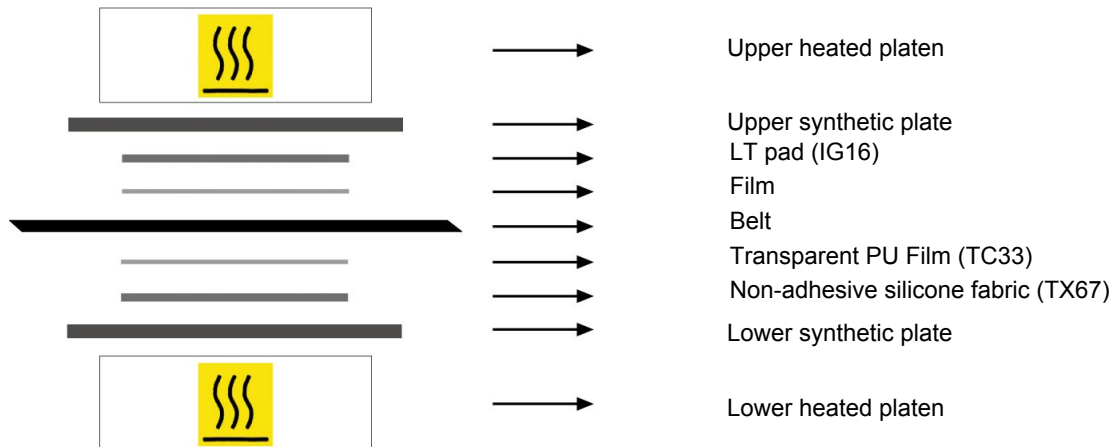

• Notes

Issued: 07-11-2019

Last Update: 23-01-2021

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.