

CODE NA225
TYPE
SILON 25 HC
COMPOSITION


Conveying surface	Material	Non-woven polyester (PET)	
	Thickness	--- mm	--- in.
	Surface pattern	Rough	
	Colour	Anthracite	
	Coefficient of friction	LF	
Textile carcass	Material	Polyester (PET)	
	Plies no.	3	
	Weft type	Flexible	
Driving surface	Material	Non-woven polyester (PET)	
	Thickness	--- mm	--- in.
	Surface pattern	Rough	
	Colour	Anthracite	

TECHNICAL SPECIFICATIONS

Total thickness	2.50 mm	0.10 in.
Weight	1.45 kg/m ²	0.30 lbs./sq.ft
Elongation at 1%	10 N/mm	57.0 lbs./in.
Max. admissible pull	10 N/mm	57.0 lbs./in.
Temperature resistance ⁽¹⁾		
■ Min.	-20 °C	-4 °F
■ Max. - Single-z joint	100 °C	212 °F
■ Max. - Skived joint	120 °C	248 °F
⁽¹⁾ use of the belt with limit values may reduce its life		
Minimum roller diameter		
■ Knife edge	no	
■ Bending roller - Single-z joint	30 mm	1.2 in.
■ Bending roller - Skived joint	30 mm	1.2 in.
■ Counter-bending roller	50 mm	2.0 in.
Coefficient of friction on driving surface		
■ Raw steel sheet	0.20 [-]	
■ Laminated plastic/wood	0.25 [-]	
■ Steel roller	0.20 [-]	
■ Rubberized roller	0.30 [-]	
Max. production width	2000 mm	79 in.

COMPLIANCES

REACH EC 1907/2006 Regulation and Amendments

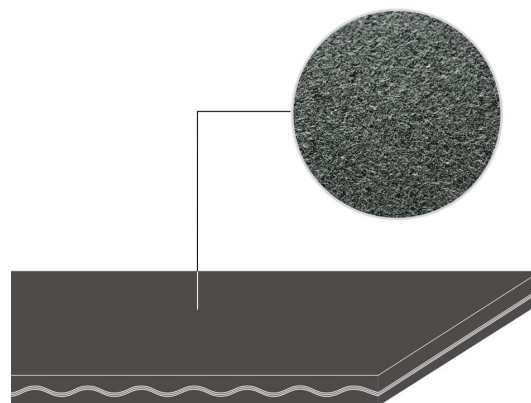
FEATURES

Humidity influence	yes
Suitable to metal detector	no
Permanent antistatic dynamically (UNI EN ISO 21179)	yes
Static conductivity (UNI EN ISO 284)	yes
Conveying on skid bed	yes
Conveying on rollers	yes
Conveying on skid bed on top and return	yes
Troughed conveying	yes
Swan neck conveying	no
Inclined conveying	no
Accumulators belts	yes
Curved conveyor	no
Chemical resistances link	11

SUITABLE FOR

Textile: automatic cutting
 Wood industry
 Box folding industry
 Packaging
 Corroierie
 Cutting tables

NOTES

Static conductivity (UNI EN ISO 284)
 Conveying surface 10⁶ to 10⁸ Ohm per Sqm
 Driving surface 10⁶ to 10⁸ Ohm per Sqm
 Due to the product structure, these data represents a guideline only and can be changed without notice.

Issue: 24-07-2009

Last Update: 16-01-2018

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.

CODE **NA225**

TYPE

SILON 25 HC


Recommended joining procedure

SINGLE Z - 80 x 20 mm

Other joining methods can be used:

DIAGONAL SINGLE Z
SKIVED JOINT '1'

Check our general catalogue to get further info on CHIORINO joining methods.

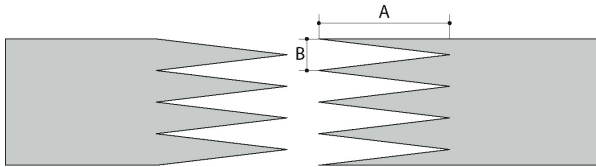


A	80 mm
B	20 mm

• **Pressing**

Heating press **P \ PL \ PLS**

Press settings	
Upper platen temperature	165 °C
Lower platen temperature	165 °C
Temperature gauge setting	165 °C
Curing time in press	3 min.
Pressure	1,5 bar
Film	see notes
Cement	---


1. Use the KM330 thermometer to check the effective temperature inside the belt. Place the thermometer gauge as shown by the drawing at side.



2. Allow the cooling cycle to be completed before removing the belt from the press.

3. A reliable strength of the joint is ensured, providing that temperatures reached by the press are those indicated in the table at side. A periodical inspection of the thermostats is recommended, to make sure they function correctly.

• **Layout of components**

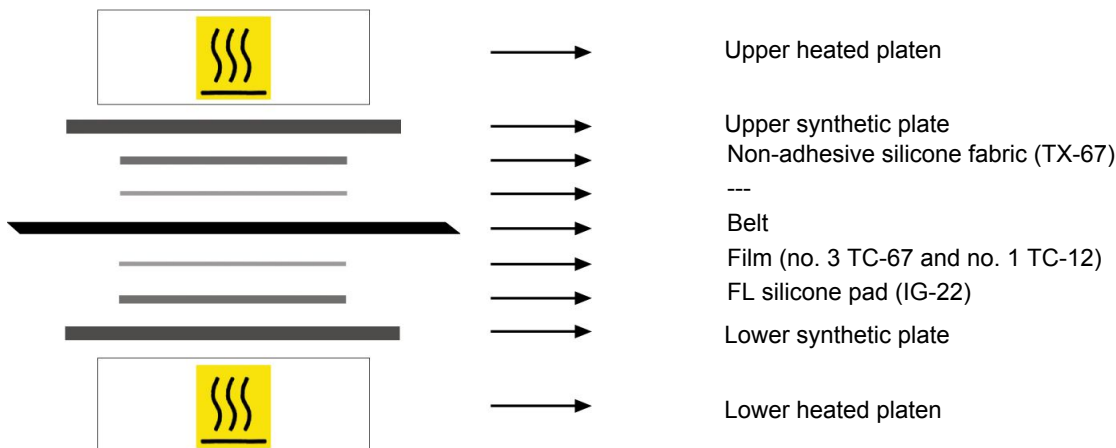

• **Notes**

1. Apply in sequence 3 layers of TC-67 + 1 layer of TC-12 film. PU layer on contact with the belt.
2. Space out the ends of 3 mm.

Issued: 06-02-2013

Last Update: 11-12-2017

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.

CODE NA225
TYPE
SILON 25 HC
• Recommended joining procedure
SKIVED JOINT '1'


Check our general catalogue to get further info on CHIORINO joining methods.

• Skiving instructions

Skiver	Belt thickness mm	Length mm	Straight/ diagonal cut	Cam/ wedge number	Pulley				Top cover			
					T mm	B mm	Thickness adjustment	End stop switch of working plate	T mm	B mm	Thickness adjustment	End stop switch of working plate
B600 A	2,5	40	Diagonal	1-10	15	5	18.95	---	---	---	---	---
B300 SA	---	---	---	---	---	---	---	---	---	---	---	---

• Guide to the use of adhesives


 Pour the **I hardener** with the **R cement** (pot-life 2 hours).

Apply a thin layer of above mix on both splices.

Let dry for 5 minutes, then match the belt ends, paying attention to align properly.

Press according to the instructions shown.

To ensure best joint life it is advisable not to run or tension the belt for 24 hours.

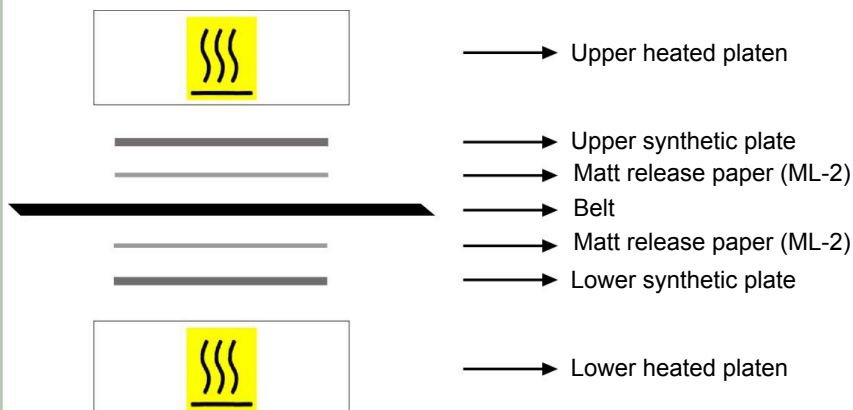• Layout of components

Press settings

Upper platen temperature	100 °C
Lower platen temperature	100 °C
Curing time in press	15 min.
Driving torque	30 Nm
Cooling time: it is recommended to remove the belt from the press once a temperature of 60/70 degrees C is reached.	

• Notes

Issue: 30-09-2005

Last Update: 30-01-2014

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.