


**Your partner  
for food production efficiency**

## High Friction belt for Rotary Cutters 1T8 U0-U2 HF W

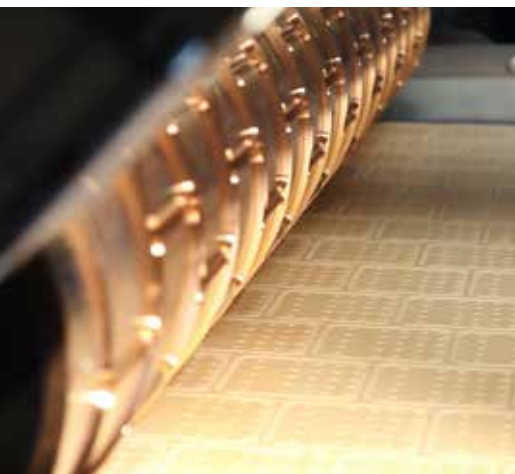

Specialized belt for rotary cutters assuring **optimal friction** and **release properties**.

The high mechanical properties guarantee an **excellent resistance to cutting**, increasing its **service life**.

KEY FEATURES	BENEFITS
HF (High Friction) surface holds the dough very firm under the blades	▶ <b>Precise dough cutting</b>
Optimal balance between friction and release	▶ <b>Production efficiency</b>
High mechanical resistance Shock absorbing	▶ <b>Long service life</b>



Code	Type	Conveying surface coating		Permanent antistatic	Total thickness mm	Min. diameter mm	Pull for 1% elongation N/mm	Temperature resistance °C	
		material	colour					min.	max.
NA-162	<b>1T8 U0-U2 HF W</b>	Polyurethane (TPU)	white	no	1.1	6	8	-20	100



Certified food Compliance

**REGULATION EC 1935/2004** and amendments

**REGULATION EC 2023/2006** and amendments

**REGULATION EU 10/2011** and amendments

**FDA (Food and Drug Administration)**

