

**CONVEYOR AND PROCESS BELTS**
**TECHNICAL DATA SHEET**
**CODE NA1139**
**TYPE**
**NT2 HS**
**COMPOSITION**

<b>Conveying surface</b>	Material	Synthetic elastomer	
	Thickness	0.50 mm	0.020 in.
	Surface pattern	FL	
	Colour	Green	
	Coefficient of friction	MF	
<b>Textile carcass</b>	Material	Polyamide (PA)	
	Plies no.	2	
	Weft type	Flexible	
<b>Driving surface</b>	Material	Fabric with polyurethane (TPU) impregnation	
	Thickness	--- mm	--- in.
	Surface pattern	Fabric	
	Colour	Black	

**TECHNICAL SPECIFICATIONS**

Total thickness	2.00 mm	0.08 in.	
Weight	2.10 kg/m <sup>2</sup>	0.43 lbs./sq.ft	
Elongation at 1%	4 N/mm	20.0 lbs./in.	
Max. admissible pull	7 N/mm	40.0 lbs./in.	
Temperature resistance <sup>(1)</sup>	min.	-20 °C	-4 °F
	max.	100 °C	212 °F

<sup>(1)</sup> use of the belt with limit values may reduce its life

**Minimum roller diameter <sup>(2)</sup>**

■ Knife edge	no	
■ Bending roller	20 mm	0.8 in.
■ Counter-bending roller	25 mm	1.0 in.

<sup>(2)</sup> The above mentioned values depend on the type of CHIORINO joint recommended


**Coefficient of friction on driving surface**

■ Raw steel sheet	0.20 [-]
■ Laminated plastic/wood	0.25 [-]
■ Steel roller	0.20 [-]
■ Rubberized roller	0.30 [-]

Max. production width      1800 mm      71 in.

**SUITABLE FOR**

Wood industry  
 Paper industry: cutters  
 Printing and graphic: stacking  
 Printing and graphic: insertion cassettes wind./unwinding  
 Printing and graphic: gathering  
 Printing and graphic: wrapping / binding  
 Packaging  
 Mechanical industry

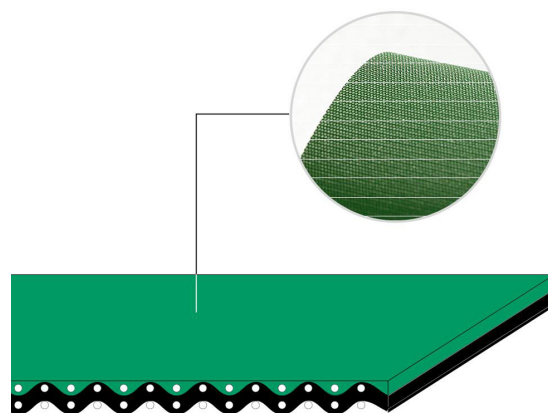

**FEATURES**

Humidity influence	yes
Suitable to metal detector	no
Permanent antistatic dynamically (UNI EN ISO 21179)	yes
Static conductivity (UNI EN ISO 284)	no
Conveying on skid bed	yes
Conveying on rollers	yes
Conveying on skid bed on top and return	no
Troughed conveying	yes
Swan neck conveying	no
Inclined conveying	yes
Accumulators belts	no
Curved conveyor	no
Chemical resistances <a href="#">link</a>	6

**COMPLIANCES**

REACH EC 1907/2006 Regulation and Amendments

**NOTES**

Good resistance to emulsifying mineral oils etc.

Issue: 10-10-2011

Last Update: 01-03-2019

**DISCLAIMER**

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.

CODE NA1139

TYPE

NT2 HS

• Recommended joining procedure SKIVED JOINT '4'



Check our general catalogue to get further info on CHIORINO joining methods.


• Skiving instructions

Skiver	Belt thickness mm	Length mm	Straight/ diagonal cut	Cam/ wedge number	Pulley				Top cover			
					T mm	B mm	Thickness adjustment	End stop switch of working plate	T mm	B mm	Thickness adjustment	End stop switch of working plate
B600 A	2,00	40	Straight	1.5-10	32	0	18,55	---	31	6	17,95	---
B300 SA	2,00	40	Straight	1.5-10	36	0	11-19	---	35	6	11-08	---

• Guide to the use of adhesives

Apply the **K cement** on the polyamide part of the splices. Apply the **H primer** on the elastomer part of the two splices and the **B cement** on the elastomer part of a single splice.  
 Let dry for 5 minutes, then match the belt ends, paying attention to align properly.  
 Press according to the instructions shown.  
 To ensure best joint life it is advisable not to run or tension the belt for 24 hours.

• Layout of components

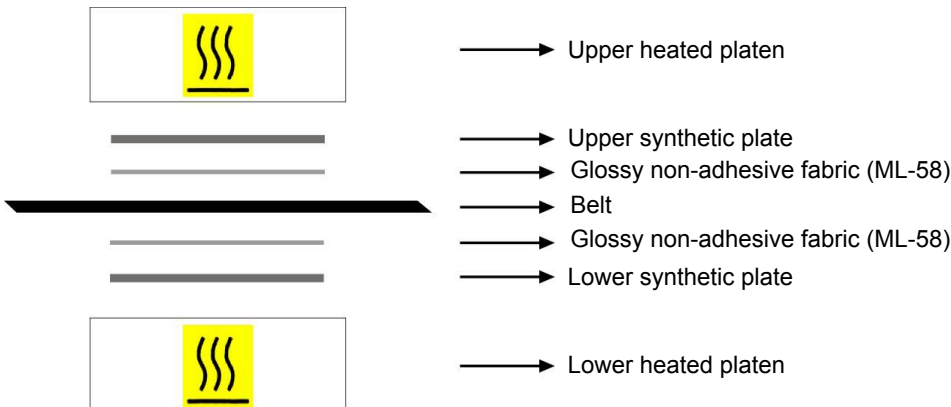

Press settings	
Upper platen temperature	100 °C
Lower platen temperature	100 °C
Curing time in press	10 min.
Driving torque	30
Cooling time: it is recommended to remove the belt from the press once a temperature of 60/70 degrees C is reached.	

• Notes

Issue: 16-12-2011

Last Update: 30-01-2014

**DISCLAIMER**

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.